


東芝ランプ 配光データシート

名称	レフランプ (屋内用)
形名	RF100V100WM
光束	1200 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

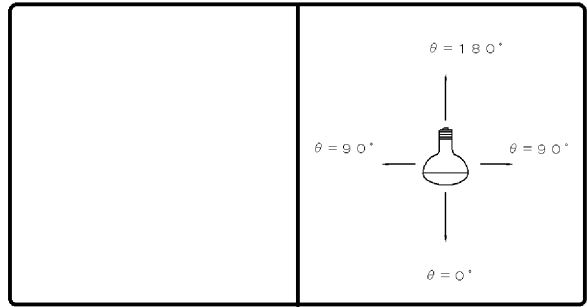

効率	F	%
	F	%
	F	100 %
	器具光束	1200 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
θ	φ	A-A	B-B C-C
0°		409	
10°		401	
20°		381	
30°		348	
40°		286	
50°		205	
60°		118	
70°		61	
80°		27	
90°		0	
100°		0	
110°		0	
120°		0	
130°		0	
140°		0	
150°		0	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井	80						70						50						30		20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	照明率 (×0.01)																						
0.60	63	58	49	47	41	39	61	57	48	46	40	39	47	45	39	39	39	38	34	32			
0.80	74	68	60	57	51	49	72	66	59	56	51	49	57	55	50	48	49	48	43	41			
1.00	84	75	70	65	61	58	81	74	69	65	60	58	66	63	59	57	58	56	52	50			
1.25	91	81	79	72	70	65	88	80	77	71	69	65	74	69	67	64	65	63	59	57			
1.50	97	85	85	77	76	71	94	84	83	76	75	70	80	75	73	69	71	68	64	62			
2.00	105	91	95	84	87	79	101	90	92	83	85	78	88	82	82	77	79	76	72	70			
2.50	109	94	100	89	93	84	106	93	98	88	91	83	93	86	87	82	84	80	77	75			
3.00	113	97	105	92	98	88	109	95	102	91	96	87	96	89	92	85	88	84	81	79			
4.00	117	99	111	96	105	92	113	98	107	95	102	91	101	92	97	90	92	88	85	83			
5.00	120	101	114	98	109	95	115	100	111	97	106	94	104	95	101	92	95	91	88	86			
10.00	125	104	122	103	119	101	120	103	118	102	115	100	110	99	108	98	102	96	94	92			

