


# 東芝ランプ 配光データシート

名称	LED電球
形名	LEL-AW4L/D
光束	230 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

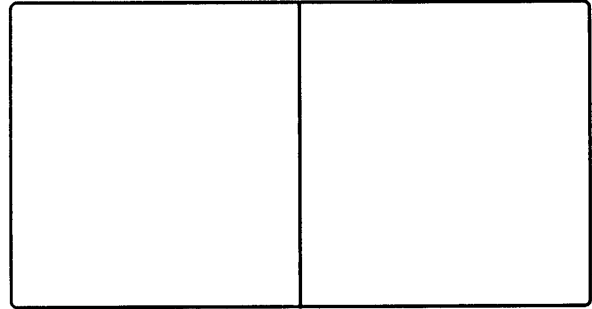

効率	F	%
	F	%
	F	100 %
	器具光束	230 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考	
----	--

光度 (cd/1000lm)			
θ	φ	A-A	B-B C-C
0°		244	
10°		242	
20°		233	
30°		220	
40°		200	
50°		174	
60°		144	
70°		112	
80°		81	
90°		56	
100°		37	
110°		25	
120°		16	
130°		11	
140°		3	
150°		1	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井	80						70						50						30	20	0
	壁	70		50		30		70		50		30		50		30		30	10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
室指数	照 明 率 (×0.01)																					
0.60	57	53	42	40	32	31	55	51	40	38	31	30	38	36	30	29	28	28	23	20		
0.80	68	62	52	49	42	40	65	59	50	47	41	39	47	45	39	37	37	36	30	27		
1.00	77	69	61	57	51	48	74	67	59	55	49	47	55	52	46	45	44	43	37	34		
1.25	85	75	70	64	59	55	81	73	67	62	57	54	62	58	54	51	51	49	43	40		
1.50	91	80	76	69	66	61	86	77	73	67	63	59	68	63	60	57	56	54	48	45		
2.00	99	86	86	77	76	70	94	83	83	75	74	68	76	71	69	65	64	62	56	52		
2.50	105	90	93	82	84	75	99	87	89	80	80	73	82	75	75	70	70	67	61	57		
3.00	109	93	98	86	89	80	103	90	94	84	86	78	86	79	80	74	74	71	65	61		
4.00	114	97	105	91	97	85	108	94	100	88	93	83	91	84	86	80	80	76	71	67		
5.00	117	99	109	94	103	89	111	96	104	91	98	87	95	87	90	83	83	79	75	70		
10.00	124	104	120	101	115	98	118	101	114	98	110	96	103	93	101	91	92	87	83	79		

