


# 東芝ランプ 配光データシート

名称	東芝LED電球
形名	LDA9L-G
光束	640 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

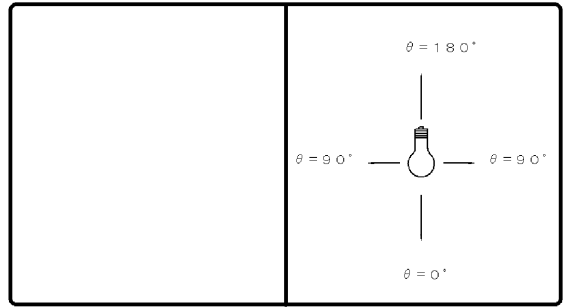

効 率	F	%
	F	%
	F	100 %
	器具 光束	640 lm

最大取付間隔	
A-A	1.5 H
B-B	1.5 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	107		
10°	107		
20°	107		
30°	107		
40°	107		
50°	106		
60°	103		
70°	99		
80°	94		
90°	88		
100°	80		
110°	71		
120°	62		
130°	52		
140°	43		
150°	34		
160°	26		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	照 明 率 (×0.01)																								
0.60	50	46	35	33	26	25	46	43	33	31	25	24	28	27	21	21	18	18	13	9					
0.80	59	54	44	41	34	33	55	50	41	39	32	31	35	34	28	27	24	23	18	14					
1.00	67	61	52	48	42	39	62	56	48	45	39	37	41	39	34	33	29	28	22	17					
1.25	74	66	59	54	49	46	68	61	55	51	45	43	47	44	39	38	34	33	26	21					
1.50	80	70	65	59	55	51	73	65	61	56	51	48	52	48	44	42	38	37	30	24					
2.00	87	76	74	66	64	59	80	71	69	62	60	55	59	55	52	49	44	43	36	29					
2.50	93	80	81	71	71	64	85	75	75	67	66	60	64	59	57	53	49	47	40	33					
3.00	96	83	86	75	76	68	88	77	79	70	71	64	67	62	61	57	52	50	43	36					
4.00	101	86	92	80	84	74	93	81	85	75	78	70	72	66	67	62	57	54	48	40					
5.00	105	88	97	83	89	78	96	83	89	78	83	74	76	69	71	65	60	57	51	43					
10.00	112	94	107	90	102	87	103	88	99	85	95	82	84	76	81	73	68	64	59	50					

