


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-05011N-LS1

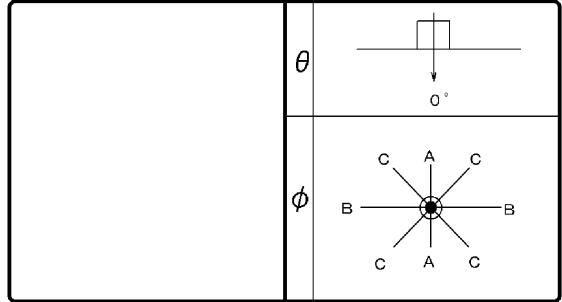

効 率	F ◡	0 %
	F ◡	100 %
	F ○	100 %
	器具 光束	520 lm

保守 率	良	0.76
	中	0.72
	否	0.64

前面	下面開放
反射面	白

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	536		
10°	519		
20°	476		
30°	415		
40°	322		
50°	177		
60°	70		
70°	31		
80°	12		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0								
	壁	70		50		30		70		50		30		50		30		30		30		10		0		30		10		0		10		0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10					
室指数	固有照明率 (×0.01)																																							
0.60	72	66	60	57	52	51	71	65	59	56	52	50	58	55	51	50	50	49	46	44	72	66	60	57	52	51	71	65	59	56	52	50	58	55	51	50	50	49	46	44
0.80	85	77	73	68	65	63	83	76	72	68	65	62	70	67	64	62	63	61	58	56	85	77	73	68	65	63	83	76	72	68	65	62	70	67	64	62	63	61	58	56
1.00	91	82	80	74	72	68	89	81	79	73	71	68	76	72	70	67	68	67	63	61	91	82	80	74	72	68	89	81	79	73	71	68	76	72	70	67	68	67	63	61
1.25	98	87	87	80	80	75	96	86	86	79	79	74	83	78	77	73	75	73	69	67	98	87	87	80	80	75	96	86	86	79	79	74	83	78	77	73	75	73	69	67
1.50	103	90	93	84	85	79	100	89	91	83	84	79	87	82	81	78	79	77	73	72	103	90	93	84	85	79	100	89	91	83	84	79	87	82	81	78	79	77	73	72
2.00	110	95	101	90	94	86	106	94	99	89	93	85	94	88	89	84	86	83	80	78	110	95	101	90	94	86	106	94	99	89	93	85	94	88	89	84	86	83	80	78
2.50	113	98	106	94	100	90	110	97	103	93	98	89	98	91	94	88	90	86	84	82	113	98	106	94	100	90	110	97	103	93	98	89	98	91	94	88	90	86	84	82
3.00	116	100	110	96	104	93	112	98	107	95	101	92	101	93	97	90	93	89	87	85	116	100	110	96	104	93	112	98	107	95	101	92	101	93	97	90	93	89	87	85
4.00	120	102	114	99	110	96	116	101	111	98	107	95	105	96	102	94	97	92	90	88	120	102	114	99	110	96	116	101	111	98	107	95	105	96	102	94	97	92	90	88
5.00	122	103	117	101	113	98	118	102	114	100	110	98	107	98	104	96	99	94	92	90	122	103	117	101	113	98	118	102	114	100	110	98	107	98	104	96	99	94	92	90
10.00	126	106	124	104	121	103	122	104	119	103	117	102	112	101	110	100	104	98	97	95	126	106	124	104	121	103	122	104	119	103	117	102	112	101	110	100	104	98	97	95

