


東芝照明器具配光データシート

| | |
|----|-----------------|
| 名称 | LEDダウンライト |
| 形名 | LEDD-60413N-LD9 |

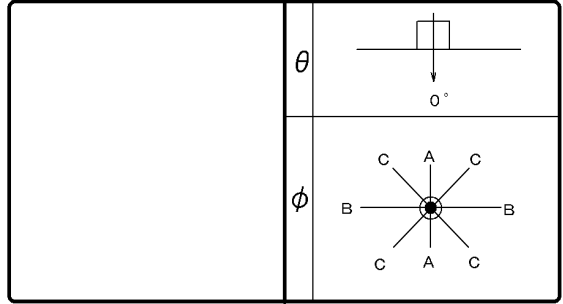

| | | |
|--------|------|---------|
| 効 率 | F | 0 % |
| | F | 100 % |
| | F | 100 % |
| | 器具光束 | 5700 lm |

| | | |
|-----|---|------|
| 保守率 | 良 | 0.67 |
| | 中 | 0.63 |
| | 否 | 0.56 |

| | |
|-----|--------|
| 前面 | 下面開放 |
| 反射面 | 塗装 (白) |

| | |
|--------|-------|
| 最大取付間隔 | |
| A-A | 0.8 H |
| B-B | 0.8 H |

備考

| 光度 (cd/1000lm) | | | |
|-------------------------|------|-----|-----|
| $\theta \setminus \phi$ | A-A | B-B | C-C |
| 0° | 1181 | | |
| 10° | 1092 | | |
| 20° | 817 | | |
| 30° | 446 | | |
| 40° | 212 | | |
| 50° | 64 | | |
| 60° | 12 | | |
| 70° | 4 | | |
| 80° | 1 | | |
| 90° | 0 | | |
| 100° | 0 | | |
| 110° | 0 | | |
| 120° | 0 | | |
| 130° | 0 | | |
| 140° | 0 | | |
| 150° | 0 | | |
| 160° | 0 | | |
| 170° | 0 | | |
| 180° | 0 | | |

| 反射率 (%) | 天井 | 80 | | | 70 | | | 50 | | | 30 | | 20 | 0 | | | | | | | |
|---------|----|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|
| | 壁 | 70 | 50 | 30 | 70 | 50 | 30 | 50 | 30 | 30 | 30 | 10 | 0 | | | | | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0 | | | | | | | |
| 室指数 | | 固有照明率 (×0.01) | | | | | | | | | | | | | | | | | | | |
| 0.60 | | 88 | 81 | 79 | 75 | 73 | 71 | 87 | 81 | 78 | 75 | 73 | 71 | 77 | 74 | 72 | 71 | 72 | 70 | 68 | 67 |
| 0.80 | | 100 | 91 | 91 | 85 | 86 | 82 | 98 | 90 | 90 | 85 | 85 | 82 | 88 | 84 | 84 | 81 | 83 | 81 | 79 | 78 |
| 1.00 | | 104 | 93 | 95 | 88 | 89 | 85 | 102 | 92 | 94 | 88 | 89 | 84 | 91 | 87 | 87 | 84 | 85 | 83 | 81 | 80 |
| 1.25 | | 108 | 96 | 100 | 91 | 94 | 88 | 105 | 95 | 98 | 91 | 93 | 88 | 95 | 90 | 91 | 87 | 89 | 86 | 84 | 83 |
| 1.50 | | 111 | 98 | 103 | 94 | 98 | 91 | 108 | 97 | 101 | 93 | 96 | 90 | 98 | 92 | 94 | 89 | 91 | 88 | 86 | 85 |
| 2.00 | | 116 | 100 | 109 | 97 | 104 | 95 | 112 | 99 | 106 | 96 | 102 | 94 | 102 | 95 | 98 | 93 | 95 | 92 | 90 | 88 |
| 2.50 | | 118 | 102 | 112 | 99 | 107 | 97 | 115 | 101 | 110 | 98 | 105 | 96 | 105 | 97 | 101 | 95 | 98 | 94 | 92 | 90 |
| 3.00 | | 120 | 103 | 115 | 101 | 110 | 98 | 117 | 102 | 112 | 100 | 108 | 98 | 106 | 98 | 103 | 96 | 99 | 95 | 93 | 92 |
| 4.00 | | 123 | 104 | 119 | 103 | 115 | 101 | 119 | 103 | 115 | 102 | 112 | 100 | 109 | 100 | 107 | 99 | 102 | 97 | 96 | 94 |
| 5.00 | | 125 | 105 | 121 | 104 | 118 | 102 | 120 | 104 | 117 | 103 | 115 | 102 | 111 | 101 | 109 | 100 | 103 | 98 | 97 | 95 |
| 10.00 | | 128 | 107 | 126 | 106 | 125 | 106 | 124 | 106 | 122 | 105 | 121 | 105 | 114 | 103 | 113 | 103 | 107 | 101 | 100 | 98 |

