


東芝照明器具配光データシート

| | |
|----|------------------|
| 名称 | LEDダウンライト |
| 形名 | LEDD-60011MN-LD9 |

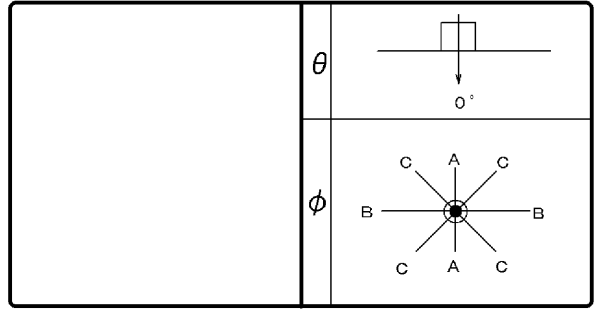

| | | |
|--------|------|---------|
| 効 率 | F | 0 % |
| | F | 100 % |
| | F | 100 % |
| | 器具光束 | 6000 lm |

| | | |
|-----|---|------|
| 保守率 | 良 | 0.76 |
| | 中 | 0.72 |
| | 否 | 0.64 |

| | |
|-----|------|
| 前面 | 梨地処理 |
| 反射面 | 下面開放 |

| | |
|--------|--------|
| 最大取付間隔 | |
| A-A | 1.13 H |
| B-B | 1.13 H |

備考

| 光度 (cd/1000lm) | | | |
|-------------------------|-----|-----|-----|
| $\theta \setminus \phi$ | A-A | B-B | C-C |
| 0° | 695 | | |
| 10° | 670 | | |
| 20° | 629 | | |
| 30° | 535 | | |
| 40° | 337 | | |
| 50° | 85 | | |
| 60° | 18 | | |
| 70° | 1 | | |
| 80° | 0 | | |
| 90° | 0 | | |
| 100° | 0 | | |
| 110° | 0 | | |
| 120° | 0 | | |
| 130° | 0 | | |
| 140° | 0 | | |
| 150° | 0 | | |
| 160° | 0 | | |
| 170° | 0 | | |
| 180° | 0 | | |

| 反射率 (%) | 天井 | | 80 | | | | 70 | | | | 50 | | | | 30 | | 20 | | 0 | | | | | |
|---------|-------|-----|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|----|
| | 壁 | 床 | 70 | | 50 | | 30 | | 70 | | 50 | | 30 | | 50 | | 30 | | 30 | | 10 | | 0 | |
| | | | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 |
| | 室指数 | | 固有照明率 (×0.01) | | | | | | | | | | | | | | | | | | | | | |
| | 0.60 | 81 | 74 | 70 | 66 | 63 | 61 | 79 | 73 | 69 | 66 | 63 | 61 | 68 | 65 | 62 | 61 | 62 | 60 | 58 | 56 | | | |
| | 0.80 | 93 | 85 | 83 | 78 | 77 | 74 | 92 | 84 | 82 | 78 | 76 | 73 | 80 | 77 | 75 | 73 | 74 | 72 | 70 | 68 | | | |
| | 1.00 | 99 | 89 | 89 | 83 | 83 | 78 | 97 | 88 | 88 | 82 | 82 | 78 | 85 | 81 | 80 | 77 | 79 | 77 | 74 | 73 | | | |
| | 1.25 | 105 | 93 | 95 | 88 | 89 | 83 | 102 | 92 | 94 | 87 | 88 | 83 | 91 | 86 | 86 | 82 | 84 | 81 | 79 | 78 | | | |
| | 1.50 | 108 | 95 | 100 | 91 | 94 | 87 | 105 | 94 | 98 | 90 | 92 | 87 | 95 | 89 | 90 | 86 | 88 | 85 | 82 | 81 | | | |
| | 2.00 | 114 | 99 | 107 | 95 | 101 | 92 | 111 | 98 | 104 | 95 | 99 | 92 | 100 | 93 | 96 | 91 | 93 | 90 | 87 | 86 | | | |
| | 2.50 | 117 | 101 | 111 | 98 | 105 | 95 | 114 | 100 | 108 | 97 | 103 | 94 | 103 | 95 | 99 | 93 | 96 | 92 | 90 | 88 | | | |
| | 3.00 | 119 | 102 | 114 | 99 | 109 | 97 | 116 | 101 | 111 | 99 | 106 | 96 | 105 | 97 | 102 | 95 | 98 | 94 | 92 | 90 | | | |
| | 4.00 | 122 | 104 | 117 | 102 | 113 | 100 | 118 | 103 | 114 | 101 | 111 | 99 | 108 | 99 | 105 | 97 | 101 | 96 | 94 | 92 | | | |
| | 5.00 | 124 | 105 | 120 | 103 | 116 | 101 | 120 | 103 | 116 | 102 | 113 | 100 | 110 | 100 | 107 | 99 | 102 | 97 | 95 | 94 | | | |
| | 10.00 | 127 | 106 | 125 | 105 | 123 | 104 | 123 | 105 | 121 | 104 | 119 | 103 | 113 | 102 | 112 | 101 | 105 | 100 | 98 | 96 | | | |

