


# 東芝ランプ 配光データシート

名称	
形名	LDT57L-G-E 39
光束	7100 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

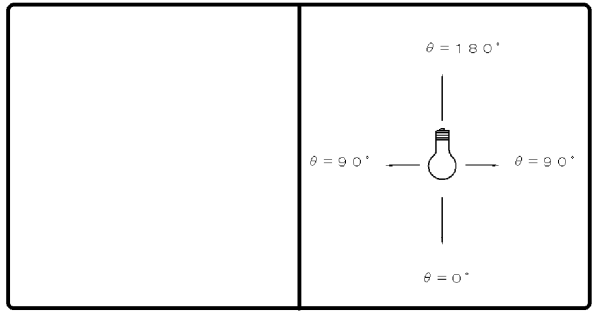


効率	F		%
	F		%
	F	100	%
	器具光束	7100	lm

最大取付間隔	
A-A	5.65 H
B-B	5.65 H

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	7		
10°	14		
20°	27		
30°	42		
40°	58		
50°	74		
60°	88		
70°	99		
80°	106		
90°	109		
100°	107		
110°	101		
120°	90		
130°	75		
140°	58		
150°	41		
160°	24		
170°	9		
180°	0		

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30		70	50	30		50	30		50	30	30	10	0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		照明率 (×0.01)																		
0.60	46	43	32	30	23	22	42	39	29	27	20	20	23	22	16	16	12	12	7	3
0.80	55	50	40	37	30	28	49	45	36	34	27	26	29	27	22	21	17	16	10	5
1.00	62	56	47	43	36	34	56	51	42	40	33	31	34	32	27	26	21	20	14	8
1.25	69	61	54	49	43	40	62	56	49	45	39	37	39	37	32	30	25	24	17	10
1.50	74	65	60	54	49	45	67	59	54	49	44	41	43	41	36	34	28	27	20	13
2.00	82	71	69	61	58	53	74	65	62	56	53	49	50	46	43	40	34	32	25	17
2.50	87	75	75	66	65	58	78	69	68	61	59	54	54	50	48	45	37	36	28	20
3.00	91	78	80	70	70	62	82	71	72	64	64	58	58	53	52	48	41	39	31	22
4.00	96	82	86	75	78	68	86	75	78	69	71	63	63	57	57	53	45	43	35	26
5.00	99	84	91	78	83	72	89	77	82	72	75	67	66	60	61	56	48	46	38	28
10.00	107	89	102	86	97	82	96	83	92	79	87	76	74	67	71	64	57	53	46	36

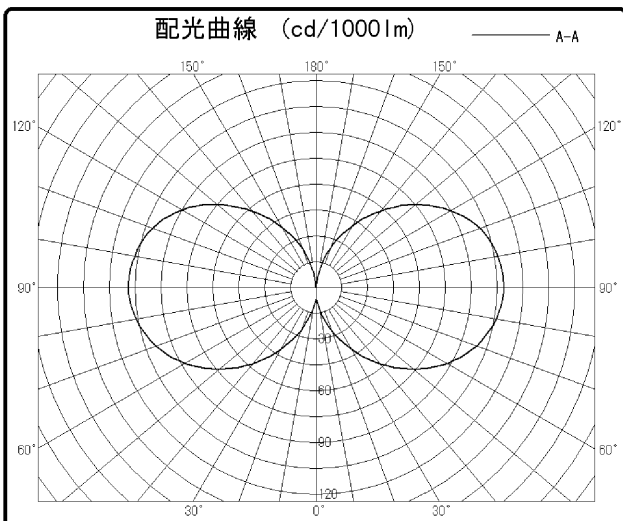

高さ (m)	単位 lx																初期値				
0																					
1																					
2																					
3																					
4																					
5																					
	4	3	2	1	0	1	2	3	4	[水平距離 (m)]											