

# 東芝照明器具配光データシート


名称	東芝LED照明器具
形名	LEDD-00003N-LS1

光源	名称	LEDランプ
	形名	LDT1L-H-E12 /2
	光束	1 lm × 1

前面	下面開放
反射面	白色

保守率	良	0.67
	中	0.63
	否	0.56

効率	F	0%
	F	51%
	F	51%
	器具光束	1 lm

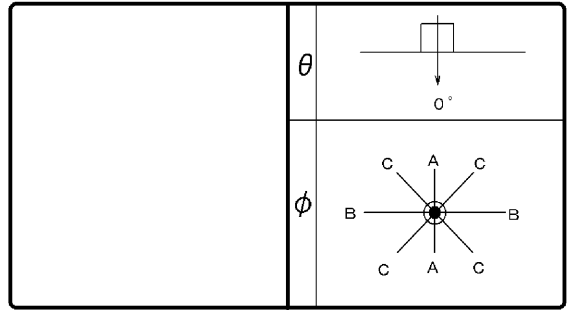

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考	
----	--

θ \ φ	光度 (cd/1000lm)		
	A-A	B-B	C-C
0°	254		
10°	262		
20°	265		
30°	242		
40°	139		
50°	55		
60°	44		
70°	25		
80°	8		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井																			
	80				70				50				30	20	0					
壁	70	50	30	70	50	30	50	30	50	30	50	30	30	10	0					
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数	照明率 (×0.01)																			
0.60	37	34	31	29	27	26	36	34	31	29	27	26	30	29	27	26	26	24	23	
0.80	43	39	38	35	34	32	42	39	37	35	33	32	36	34	33	32	32	32	30	29
1.00	47	42	41	38	37	35	45	41	40	37	36	35	39	37	36	34	35	34	32	31
1.25	50	44	44	41	40	38	48	44	43	40	40	38	42	39	39	37	38	37	35	34
1.50	52	46	47	42	43	40	50	45	46	42	42	40	44	41	41	39	40	39	37	36
2.00	55	48	51	45	47	43	54	47	50	45	47	43	48	44	45	42	43	42	40	39
2.50	57	49	53	47	50	45	55	49	52	47	49	45	49	46	47	44	45	43	42	41
3.00	59	50	55	48	52	47	57	50	54	48	51	46	51	47	49	45	47	45	43	43
4.00	61	51	58	50	55	49	58	51	56	49	54	48	53	48	51	47	49	46	45	44
5.00	62	52	59	51	57	50	59	51	57	50	55	49	54	49	53	48	50	47	46	45
10.00	64	53	63	53	61	52	62	53	60	52	59	52	57	51	56	51	53	50	49	48

