


# 東芝照明器具配光データシート

名称	LED照明器具
形名	LEDD-20035W WK

保守率	良	0.81
	中	0.77
	否	0.68

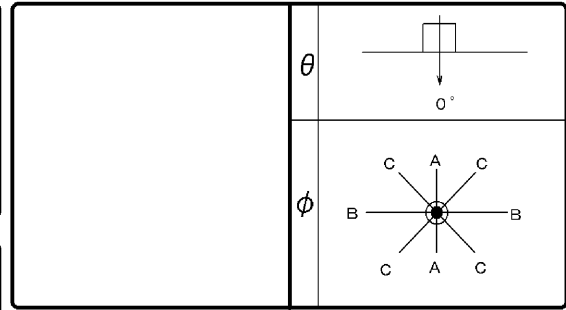

光源	名称	
	形名	LED
	光束	1450 lm × 1

効率	F	0%
	F	100%
	F	100%
	器具光束	1450 lm

最大取付間隔		備考
A-A	0.3 H	
B-B	0.3 H	

前面	
反射面	

0°	6932	25°	141
1°		30°	60
2°		35°	24
3°		40°	14
4°		45°	9
5°	6035	50°	6
6°		55°	4
7°		60°	2
8°		65°	0
9°		70°	0
10°	3586	75°	0
11°		80°	0
12°		85°	0
13°		90°	0
14°			
15°	765		
16°			
17°			
18°			
19°			
20°	265		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	50	30	50	30	50	30	50	30	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0					
室指数	照明率 (×0.01)																							
0.60	100	92	92	88	88	85	98	91	92	87	88	85	90	87	87	85	86	84	83	82				
0.80	105	96	98	92	93	90	104	95	97	92	93	89	95	91	92	89	90	88	87	86				
1.00	109	98	102	95	97	92	107	97	101	94	96	92	98	93	95	91	93	91	89	88				
1.25	111	99	104	95	99	93	109	98	102	95	98	92	100	94	96	92	94	91	89	88				
1.50	113	99	106	96	101	93	110	98	104	95	99	93	101	94	97	92	94	91	90	88				
2.00	116	101	109	98	104	95	113	100	107	97	102	94	103	95	99	93	96	92	90	89				
2.50	118	102	112	99	107	97	115	101	110	98	105	96	105	97	101	95	98	94	92	91				
3.00	120	103	115	101	111	99	117	102	112	100	108	98	107	98	104	97	100	95	94	92				
4.00	123	105	119	103	116	102	119	104	116	102	113	101	110	101	108	100	103	98	97	95				
5.00	126	106	123	105	120	104	121	105	119	104	117	103	112	102	111	102	106	100	99	98				
10.00	130	109	130	109	129	110	126	108	126	108	125	109	118	107	118	107	111	105	105	103				

