


東芝ランプ 配光データシート

名称	LEDランプ
形名	LDG7N-G/60W
光束	730 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

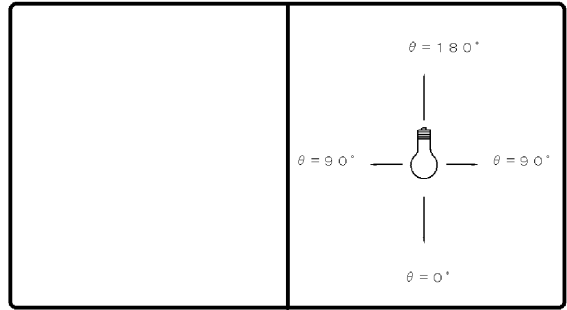

効 率	F		%
	F		%
	F	100	%
	器具 光束	730	lm

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

備考

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		139	
10°		138	
20°		136	
30°		133	
40°		129	
50°		123	
60°		115	
70°		105	
80°		95	
90°		84	
100°		73	
110°		61	
120°		50	
130°		40	
140°		30	
150°		22	
160°		16	
170°		11	
180°		1	

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10		
室指数	照明率 (×0.01)																																				
0.60	53	49	38	36	29	28	49	46	36	34	28	27	32	31	25	24	22	22	17	13																	
0.80	64	58	48	45	38	36	59	54	45	43	36	35	40	38	32	31	29	28	23	19																	
1.00	71	63	55	51	45	42	66	59	52	48	42	40	46	43	38	36	34	33	27	22																	
1.25	78	69	63	58	52	49	72	65	59	55	49	47	52	49	44	42	39	38	31	27																	
1.50	83	73	69	62	58	54	77	69	64	59	55	51	56	53	49	46	43	41	35	30																	
2.00	91	80	78	70	68	62	85	75	73	66	64	59	64	59	57	53	50	48	41	36																	
2.50	96	83	84	75	75	67	89	78	79	71	70	64	69	63	62	58	54	52	46	39																	
3.00	100	86	89	78	80	72	93	81	83	74	75	68	72	67	66	62	58	55	49	43																	
4.00	105	90	96	83	88	78	98	85	90	79	83	74	78	71	72	67	63	60	54	47																	
5.00	109	92	101	86	94	81	101	87	94	82	87	78	81	74	76	70	67	63	57	50																	
10.00	116	97	111	94	106	90	108	92	103	89	99	86	89	81	86	78	75	71	65	58																	

