


# 東芝ランプ 配光データシート

名称	LEDランプ
形名	LDG11N-G/10OW
光束	1340 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

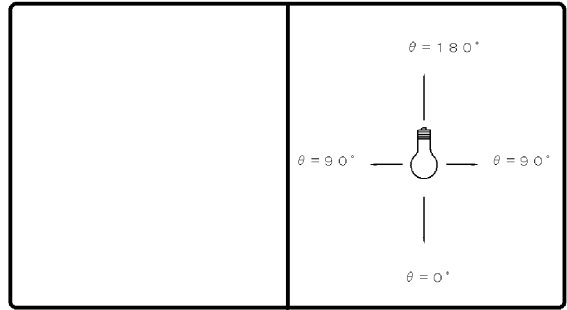

効 率	F	%
	F	%
	F	100 %
	器具 光束	1340 lm

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	131		
10°	131		
20°	129		
30°	126		
40°	122		
50°	115		
60°	108		
70°	99		
80°	89		
90°	78		
100°	67		
110°	57		
120°	46		
130°	36		
140°	28		
150°	20		
160°	15		
170°	10		
180°	1		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数	照 明 率 (×0.01)																																				
0.60	50	46	36	34	27	26	46	43	34	32	26	25	30	29	23	23	21	20	16	13																	
0.80	60	54	45	42	36	34	55	51	42	40	34	32	38	36	30	29	27	26	21	18																	
1.00	66	59	52	48	42	40	61	56	48	45	40	38	43	40	35	34	32	31	25	21																	
1.25	73	65	59	54	49	46	68	61	55	51	46	44	49	46	41	40	37	35	30	25																	
1.50	78	68	64	58	54	50	72	64	60	55	51	48	53	49	46	43	40	39	33	28																	
2.00	86	74	73	65	64	58	79	70	69	62	60	55	60	56	53	50	47	45	39	34																	
2.50	90	78	79	70	70	63	84	73	74	66	66	60	64	60	58	54	51	49	43	37																	
3.00	94	80	84	73	75	67	87	76	78	70	71	64	68	63	62	58	54	52	46	40																	
4.00	99	84	90	78	83	73	91	79	84	74	77	69	73	67	68	63	59	56	51	44																	
5.00	102	86	94	81	88	76	94	82	88	77	82	73	76	69	72	66	62	59	54	47																	
10.00	109	91	104	88	100	85	101	86	97	84	93	81	84	76	81	73	70	66	61	54																	

