


# 東芝ランプ 配光データシート

名称	LEDランプ
形名	LDA4N-H-E17 /S/40W2
光束	440 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

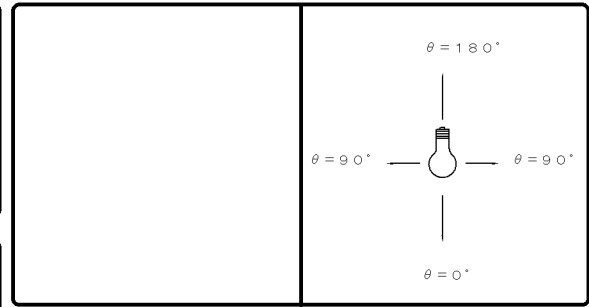

効率	F		%
	F		%
	F	100	%
	器具光束	440	lm

最大取付間隔	
A-A	1.27 H
B-B	1.27 H

備考

光度 (cd/1000lm)			
$\theta$	A-A	B-B	C-C
0°	267		
10°	263		
20°	251		
30°	231		
40°	204		
50°	173		
60°	140		
70°	107		
80°	79		
90°	55		
100°	37		
110°	25		
120°	16		
130°	11		
140°	7		
150°	4		
160°	2		
170°	2		
180°	1		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	照明率 (×0.01)																						
0.60	61	56	45	43	36	35	58	54	44	42	35	34	41	40	34	33	32	31	27	24			
0.80	73	66	57	53	47	45	69	63	55	52	46	44	52	49	43	42	41	40	35	32			
1.00	80	72	64	60	54	51	76	69	62	58	53	50	58	55	50	48	47	46	40	37			
1.25	88	78	73	67	62	58	84	75	70	65	60	57	65	61	57	55	54	52	47	43			
1.50	93	82	79	72	68	63	88	79	76	70	66	62	70	66	62	59	59	57	51	48			
2.00	102	88	89	80	79	72	97	85	85	77	76	71	79	73	71	67	67	64	59	55			
2.50	107	92	95	84	86	78	101	89	91	82	83	76	84	77	77	72	72	69	64	60			
3.00	111	95	100	88	92	82	105	92	96	85	88	80	88	81	82	76	76	73	68	63			
4.00	116	98	107	93	100	88	110	95	102	90	96	86	93	85	88	81	81	78	73	69			
5.00	119	101	111	96	105	91	113	98	106	93	100	89	97	88	92	85	85	81	76	72			
10.00	126	105	121	102	117	100	119	102	116	100	112	97	105	95	102	93	93	88	85	80			

