


東芝ランプ 配光データシート

名称	LEDランプ
形名	LDT6N-G-E17 /S/60W2
光束	810 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

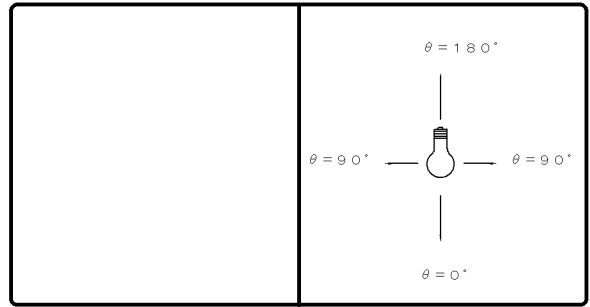

効率	F		%
	F		%
	F	100	%
	器具光束	810	lm

最大取付間隔	
A-A	2.04 H
B-B	2.04 H

備考

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		73	
10°		79	
20°		91	
30°		100	
40°		106	
50°		108	
60°		107	
70°		102	
80°		96	
90°		89	
100°		82	
110°		74	
120°		64	
130°		54	
140°		42	
150°		28	
160°		15	
170°		4	
180°		0	

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室指数	照明率 (×0.01)																						
0.60	50	46	35	33	26	25	46	42	32	31	24	24	28	27	21	21	18	18	13	9			
0.80	60	54	44	41	34	33	55	50	41	39	32	31	35	34	28	27	24	23	18	13			
1.00	66	60	51	47	41	39	61	55	47	44	38	36	41	39	33	32	28	28	22	17			
1.25	74	66	59	54	48	45	68	61	55	50	45	42	47	44	39	37	33	32	26	20			
1.50	79	69	64	58	54	50	72	64	60	55	50	47	51	48	43	41	37	36	29	23			
2.00	87	76	74	66	64	58	80	70	68	62	59	55	58	54	51	48	44	42	35	29			
2.50	92	79	80	71	70	63	84	74	74	66	65	60	63	58	56	53	48	46	39	32			
3.00	96	82	85	74	76	68	88	77	78	70	70	64	66	61	60	56	51	49	42	35			
4.00	101	86	92	79	84	73	92	80	84	75	77	69	72	66	66	61	56	54	47	39			
5.00	104	88	96	82	89	77	95	83	88	78	82	73	75	68	70	65	59	57	50	42			
10.00	111	93	106	90	102	86	102	88	98	85	94	82	83	75	80	73	68	64	58	50			

