


東芝ランプ 配光データシート

名称	レフランプ (屋外用)
形名	RF100V270WH C
光束	3500 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

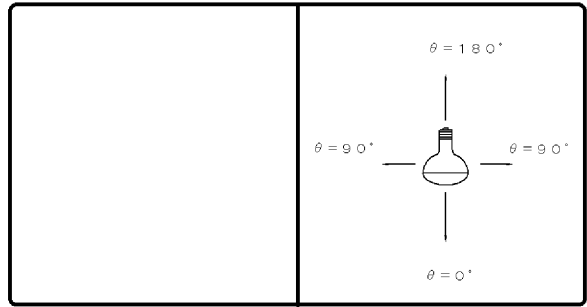

効率	F	%
	F	%
	F	100 %
	器具光束	3500 lm

最大取付間隔	
A-A	0.7 H
B-B	0.7 H

備考

光度 (cd/1000lm)			
θ	φ	A-A	B-B C-C
0°		980	
10°		1045	
20°		579	
30°		321	
40°		208	
50°		134	
60°		80	
70°		42	
80°		12	
90°		0	
100°		0	
110°		0	
120°		0	
130°		0	
140°		0	
150°		0	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井		80				70				50				30		20	0		
	壁	床	70	50	30	70	50	30	70	50	30	50	30	30	10	0				
室指数	照明率 (×0.01)																			
0.60	74	68	62	59	54	53	72	67	61	58	54	52	59	57	53	52	51	48	46	
0.80	84	76	72	67	64	62	82	75	71	67	64	61	69	66	63	61	61	60	56	55
1.00	92	83	81	75	73	69	90	82	79	74	72	69	77	73	70	68	69	67	64	62
1.25	98	87	87	80	80	75	96	86	86	79	79	74	83	78	77	73	75	72	69	67
1.50	103	91	93	84	85	79	100	89	91	83	84	79	87	82	81	78	79	77	73	71
2.00	110	95	101	90	93	85	106	94	98	89	92	85	94	87	88	83	85	82	79	77
2.50	114	98	106	93	99	89	110	97	103	92	97	89	98	90	93	87	90	86	83	81
3.00	116	100	109	96	104	92	113	99	106	95	101	92	101	93	97	90	93	89	86	84
4.00	120	102	115	99	110	96	116	101	111	98	107	96	105	96	102	94	97	92	90	88
5.00	123	104	118	101	114	99	118	102	114	100	111	98	108	98	105	96	100	95	93	91
10.00	128	107	125	106	123	104	123	105	121	104	119	103	113	102	112	101	105	100	98	96

