


■ 東芝ランプ 配光データシート

名 称	レフランプミゼット形 (屋内用)
形 名	RF100V95WM
光 束	1075 lm × 1

保 守 率	良	0.91
	中	0.89
	否	0.84

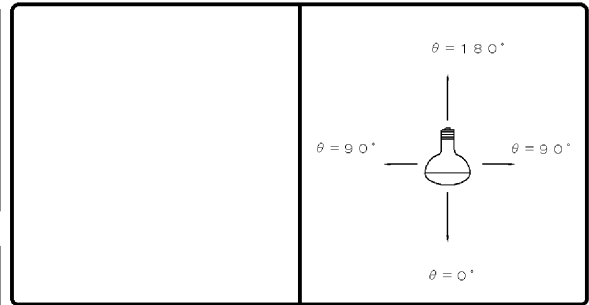

効 率	F		%
	F		%
	F	100	%
	器具 光束	1075	lm

最大取付間隔	
A-A	0.9H
B-B	0.9H

備 考	
--------	--

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		683	
10°		659	
20°		556	
30°		342	
40°		212	
50°		145	
60°		93	
70°		56	
80°		29	
90°		10	
100°		0	
110°		0	
120°		0	
130°		0	
140°		0	
150°		0	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		69	63	56	53	48	46	67	62	55	52	47	46	53	51	47	46	46	45	41	40		
0.80		79	72	66	62	58	55	77	70	65	61	57	55	63	60	56	54	55	54	50	48		
1.00		88	79	75	70	67	63	85	77	74	69	66	63	71	67	64	62	63	61	57	55		
1.25		94	84	82	75	74	69	91	82	81	75	73	69	77	73	71	68	69	67	63	61		
1.50		99	87	88	80	80	74	96	86	86	79	78	74	82	77	76	72	74	71	68	66		
2.00		106	92	96	86	89	81	103	91	94	85	87	80	89	83	84	79	81	78	74	72		
2.50		110	95	102	90	95	85	107	94	99	89	93	85	94	87	89	83	85	82	78	76		
3.00		113	97	106	93	99	89	109	96	103	91	97	88	97	89	92	86	88	85	82	80		
4.00		117	100	111	96	106	93	113	98	108	95	103	92	101	93	98	90	93	89	86	84		
5.00		120	101	115	98	110	96	116	100	111	97	107	95	104	95	101	93	96	91	89	87		
10.00		125	105	122	103	120	102	120	103	118	102	116	101	110	100	108	98	102	96	95	93		

