


■ 東芝ランプ 配光データシート

名 称	パワーレフ (屋内用)
形 名	RS100/110V6 OWE
光 束	802 lm × 1

保 守 率	良	0.91
	中	0.89
	否	0.84

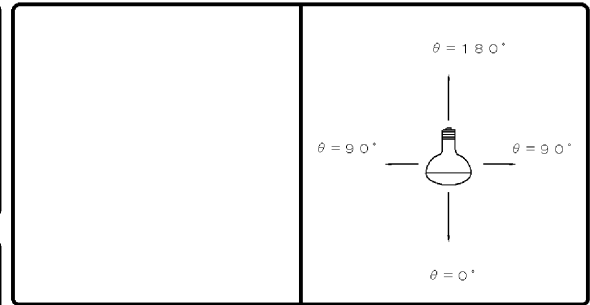

効 率	F		%
	F		%
	F	100	%
	器具 光束	802	lm

最大取付間隔	
A-A	0.7 H
B-B	0.7 H

備 考	
--------	--

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		748	
10°		605	
20°		420	
30°		328	
40°		253	
50°		182	
60°		122	
70°		67	
80°		16	
90°		0	
100°		0	
110°		0	
120°		0	
130°		0	
140°		0	
150°		0	
160°		0	
170°		0	
180°		0	

反 射 率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		66	61	52	50	44	43	64	60	52	49	44	43	50	48	43	42	42	42	38	36		
0.80		77	70	64	60	55	53	75	69	62	59	54	52	60	58	53	52	52	51	47	45		
1.00		86	77	73	68	64	61	84	76	72	67	63	60	69	66	62	60	60	59	55	53		
1.25		93	83	81	74	72	68	90	81	79	73	71	67	76	72	69	66	67	65	61	59		
1.50		99	87	87	79	79	73	96	85	85	78	77	72	82	76	75	71	73	70	66	64		
2.00		106	92	96	86	88	81	103	91	94	85	87	80	89	83	83	79	80	77	74	72		
2.50		111	96	102	90	95	85	107	94	99	89	93	85	94	87	89	83	85	82	79	77		
3.00		114	98	106	93	100	89	110	96	103	92	97	88	98	90	93	87	89	85	82	80		
4.00		118	101	112	97	107	94	114	99	109	96	104	93	102	94	99	91	94	90	87	85		
5.00		121	102	116	99	111	97	117	101	112	98	108	96	105	96	102	94	97	92	90	88		
10.00		126	106	123	104	121	103	122	104	119	103	117	102	112	101	110	100	103	98	96	94		

