


# 東芝ランプ 配光データシート

名称	クールビームライト
形名	CRF100V135W L
光束	1390 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

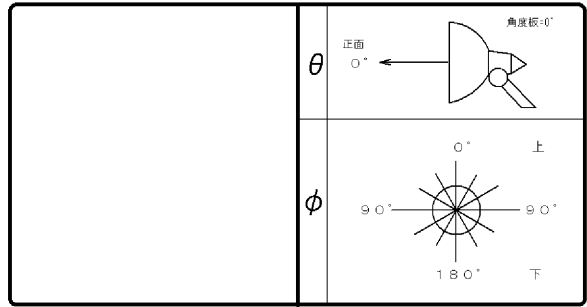

効率	F	%
	F	%
	F	100 %
	器具光束	1390 lm

最大取付間隔	
A-A	0.5 H
B-B	0.5 H

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	2680		
10°	1940		
20°	776		
30°	289		
40°	106		
50°	53		
60°	18		
70°	0		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	10	70	50	30	10	70	50	30	10	50	30	30	10	10	0
室指数	照明率 (×0.01)																			
0.60	89	82	80	76	74	71	88	81	79	75	73	71	77	74	72	71	72	70	68	67
0.80	98	89	88	83	82	79	96	88	87	82	82	79	85	81	80	78	79	78	75	74
1.00	104	94	95	88	89	84	102	93	94	88	88	84	91	87	87	84	85	83	80	79
1.25	109	96	100	92	94	88	106	95	98	91	93	87	95	90	90	87	89	86	84	82
1.50	112	98	104	94	97	91	109	97	102	93	96	90	98	92	94	89	91	88	86	85
2.00	116	101	109	97	103	94	113	100	107	97	101	94	102	95	98	93	95	91	89	88
2.50	119	103	113	100	108	97	116	102	110	99	105	96	105	97	101	95	98	94	92	90
3.00	122	104	116	101	111	99	118	103	113	101	109	98	107	99	104	97	100	96	94	92
4.00	125	106	120	104	116	102	121	105	117	103	113	101	111	101	108	100	103	98	96	95
5.00	127	107	123	106	120	104	123	106	119	105	117	103	113	103	111	102	105	100	99	97
10.00	131	110	130	109	128	109	127	109	125	108	124	108	118	106	117	106	110	104	103	101

