


■ 東芝ランプ 配光データシート

名 称	赤外線乾燥用電球
形 名	IR100V250WR HE
光 束	1700 lm × 1

保 守 率	良	0.91
	中	0.89
	否	0.84

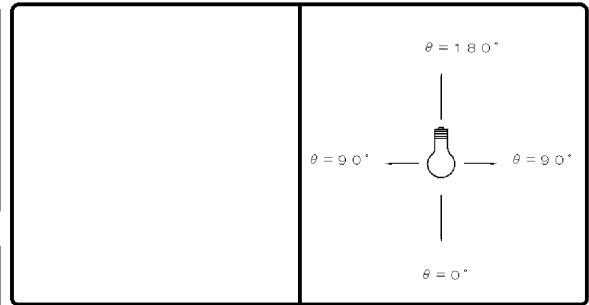

効 率	F		%
	F		%
	F	100	%
	器具 光束	1700	lm

最大取付間隔	
A-A	0.7 H
B-B	0.7 H

備 考	
--------	--

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B
0°		763	
10°		877	
20°		438	
30°		88	
40°		27	
50°		8	
60°		1	
70°		0	
80°		0	
90°		0	
100°		0	
110°		0	
120°		0	
130°		0	
140°		0	
150°		0	
160°		0	
170°		0	
180°		0	

反 射 率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		38	35	35	33	32	31	38	35	34	33	32	31	34	32	32	31	32	31	30	30		
0.80		42	38	38	36	36	34	41	38	38	36	35	34	37	35	35	34	35	34	33	32		
1.00		44	40	41	38	38	36	43	39	40	38	38	36	39	37	37	36	37	36	35	34		
1.25		46	41	42	39	40	37	45	40	42	39	40	37	40	38	39	37	38	37	36	35		
1.50		47	41	44	40	41	38	46	41	43	39	41	38	41	39	40	38	39	37	37	36		
2.00		49	42	46	41	43	40	47	42	45	40	43	39	43	40	41	39	40	38	38	37		
2.50		50	43	47	42	45	41	48	42	46	41	44	40	44	41	42	40	41	39	38	38		
3.00		51	43	48	42	46	41	49	43	47	42	45	41	45	41	43	40	42	40	39	39		
4.00		52	44	50	43	48	43	50	44	49	43	47	42	46	42	45	42	43	41	40	40		
5.00		53	45	51	44	50	43	51	44	50	44	49	43	47	43	46	42	44	42	41	40		
10.00		54	46	54	45	53	45	53	45	52	45	52	45	49	44	49	44	46	43	43	42		

