


東芝ランプ 配光データシート

名称	非常灯用電球
形名	PIL14. 4V40W S35E17
光束	780 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

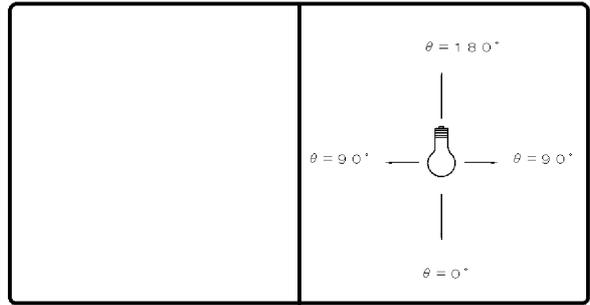

効率	F	%
	F	%
	F	100 %
	器具光束	780 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
θ	A-A	B-B	C-C
0°	88		
10°	94		
20°	92		
30°	83		
40°	68		
50°	51		
60°	37		
70°	27		
80°	23		
90°	25		
100°	31		
110°	39		
120°	44		
130°	44		
140°	36		
150°	19		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0					
	壁	70	50	30	70	50	30	70	50	30	50	30	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	0
床		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	照明率 (×0.01)																												
0.60	27	24	20	19	16	15	25	23	19	18	15	14	16	16	13	13	11	11	9	7									
0.80	31	28	24	23	20	19	29	26	23	21	19	18	20	19	17	16	15	14	12	10									
1.00	35	32	29	26	24	23	33	30	27	25	22	21	23	22	20	19	17	17	14	12									
1.25	39	34	32	29	27	26	36	32	30	28	26	24	26	24	23	22	20	19	16	14									
1.50	41	36	35	32	30	28	38	34	33	30	28	27	28	26	25	24	22	21	18	15									
2.00	45	39	39	35	35	32	41	36	36	33	33	30	31	29	28	27	24	23	20	17									
2.50	47	41	42	37	38	34	43	38	39	35	36	32	33	31	31	29	26	25	22	19									
3.00	49	42	44	39	41	36	45	39	41	36	38	34	35	32	32	30	28	26	23	20									
4.00	51	43	47	41	44	39	47	41	44	38	41	36	37	34	35	32	30	28	25	21									
5.00	52	44	49	42	46	40	48	41	45	40	43	38	38	35	36	33	31	29	26	22									
10.00	55	46	53	45	52	44	51	43	49	42	48	41	41	37	40	36	34	32	29	25									

