


東芝ランプ 配光データシート

名称	ホワイトボール
形名	GW110V10WG50
光束	60 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

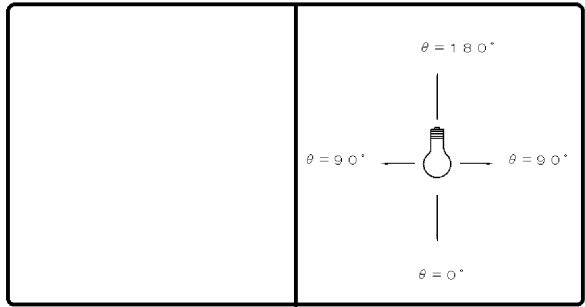

効率	F	%
	F	%
	F	100 %
	器具光束	60 lm

最大取付間隔	
A-A	1.5 H
B-B	1.5 H

備考	
----	--

光度 (cd/1000lm)			
θ	φ	A-A	B-B C-C
0°		94	
10°		94	
20°		94	
30°		94	
40°		94	
50°		92	
60°		90	
70°		87	
80°		85	
90°		83	
100°		80	
110°		78	
120°		76	
130°		74	
140°		69	
150°		57	
160°		37	
170°		7	
180°		0	

反射率 (%)	天井	80						70						50						30		20	0	
	壁	70	50	30	70	50	30	70	50	30	50	30	30	10	30	10	30	10	30	10	30	10	10	0
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	照明率 (×0.01)																							
0.60	50	46	35	33	27	26	45	42	33	31	25	24	27	26	21	20	17	17	12	8				
0.80	59	53	44	41	34	33	54	49	40	38	32	31	34	32	27	26	22	22	16	12				
1.00	67	60	52	48	41	39	61	55	48	44	38	37	40	38	33	32	27	27	20	15				
1.25	73	65	59	54	48	45	67	60	54	50	45	42	45	43	38	36	32	31	24	18				
1.50	79	69	65	59	54	50	72	64	59	55	50	47	50	47	43	41	35	34	28	21				
2.00	86	75	74	66	64	58	79	70	68	61	59	54	56	52	50	47	41	40	33	26				
2.50	91	79	80	71	70	63	83	73	73	66	65	59	61	56	55	51	45	43	37	29				
3.00	95	82	85	74	76	68	86	76	77	69	70	63	64	59	59	55	49	46	39	31				
4.00	100	85	91	79	83	73	91	79	83	73	77	68	69	63	64	59	53	50	44	35				
5.00	103	87	95	82	88	77	94	81	87	76	81	72	72	66	68	62	56	53	46	38				
10.00	110	92	105	89	101	86	101	86	96	83	93	80	80	72	77	70	64	60	54	44				

