


# 東芝照明器具配光データシート

名称	街路照明器具
形名	HG-13001K+Z L-100

保守率	良	0.73
	中	0.69
	否	0.65


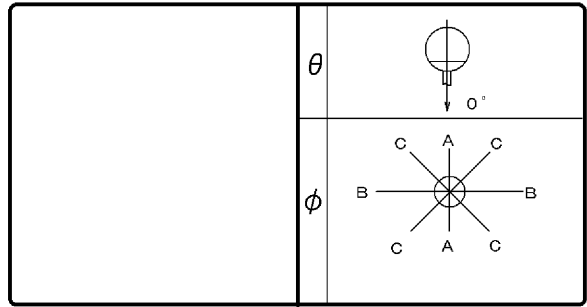


光源	名称	蛍光水銀ランプ
	形名	HF100X
	光束	4200 lm × 1

効率	F $\cap$	14.6 %
	F $\cup$	50.8 %
	F $\circ$	65.4 %
	器具光束	2746 lm

備考

前面	グローブ (透明)
反射面	

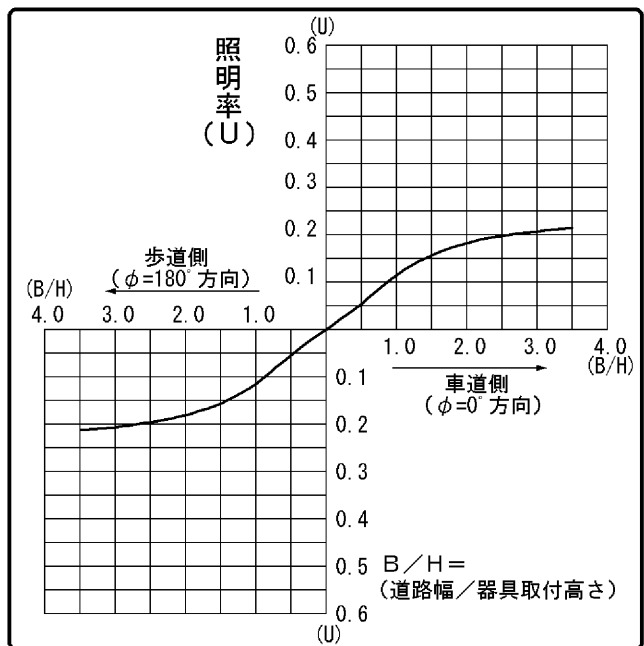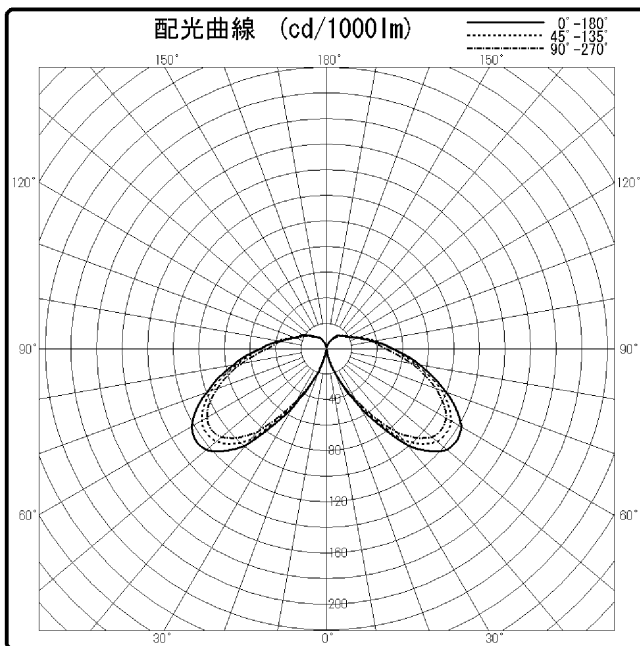

$\theta \setminus \phi$	$0^\circ$	$45^\circ$	$90^\circ$	$135^\circ$	$180^\circ$
$0^\circ$	0	0	0	0	0
$10^\circ$	3	3	2	3	3
$20^\circ$	20	20	19	20	20
$30^\circ$	54	50	47	50	54
$40^\circ$	99	93	86	93	99
$50^\circ$	123	113	108	113	123
$60^\circ$	122	113	108	113	122
$70^\circ$	100	96	91	96	100
$80^\circ$	75	72	68	72	75
$90^\circ$	52	51	46	51	52
$100^\circ$	37	38	36	38	37
$110^\circ$	26	27	26	27	26
$120^\circ$	22	21	20	21	22
$130^\circ$	17	17	16	17	17
$140^\circ$	14	13	13	13	14
$150^\circ$	10	9	9	9	10
$160^\circ$	5	5	5	5	5
$170^\circ$	3	3	3	3	3
$180^\circ$	1	1	1	1	1

