


東芝ランプ 配光データシート

名称	マスターカラー
形名	CDM-R35W/83 OPAR30L30
光束	2200 lm × 1

保守率	良	0.71
	中	0.69
	否	0.65

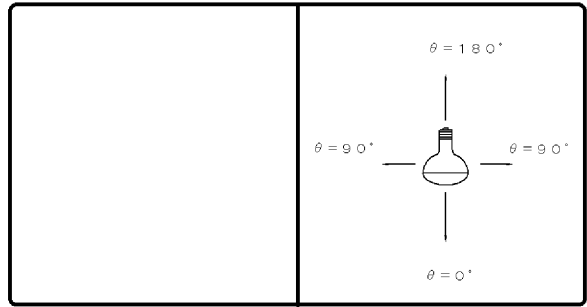

効率	F	%
	F	%
	F	100 %
	器具光束	2200 lm

最大取付間隔	
A-A	0.5 H
B-B	0.5 H

備考

光度 (cd/1000lm)			
0°	3364	25°	287
1°		30°	191
2°		35°	149
3°		40°	118
4°		45°	71
5°	3270	50°	44
6°		55°	37
7°		60°	28
8°		65°	12
9°		70°	7
10°	2906	75°	4
11°		80°	3
12°		85°	3
13°		90°	1
14°			
15°	1682		
16°			
17°			
18°			
19°			
20°	630		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	照明率 (×0.01)																						
0.60	102	94	92	87	85	83	100	93	91	87	85	83	89	86	84	82	83	82	79	78			
0.80	111	100	100	94	94	90	109	99	99	94	93	90	97	93	92	89	91	89	86	85			
1.00	117	105	107	99	101	95	115	104	106	99	100	95	103	98	98	94	96	94	91	90			
1.25	121	108	112	102	105	98	118	107	110	102	104	98	106	100	101	97	99	96	94	92			
1.50	124	110	115	105	109	101	121	108	113	104	107	100	109	102	104	99	102	98	96	94			
2.00	129	121	121	108	114	104	125	111	118	107	112	104	113	105	109	103	105	101	99	97			
2.50	132	141	125	111	119	107	128	113	122	110	117	107	116	108	121	105	108	104	101	100			
3.00	135	161	129	113	123	110	131	114	125	112	120	109	119	110	115	107	111	106	104	102			
4.00	139	181	134	116	129	114	134	117	130	115	126	113	123	112	120	111	115	109	107	105			
5.00	141	191	137	118	133	116	136	118	133	117	130	115	126	114	123	113	117	111	110	108			
10.00	146	221	145	122	143	122	141	121	140	121	139	121	131	119	131	119	123	117	115	114			

