


# 東芝ランプ 配光データシート

名称	クールビーム
形名	CRS110V80W
光束	750 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

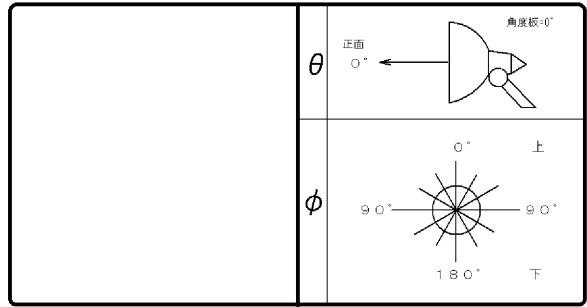

効率	F		%
	F		%
	F	100	%
	器具光束	750	lm

最大取付間隔	
A-A	0.3H
B-B	0.3H

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	8667		
10°	2934		
20°	587		
30°	173		
40°	92		
50°	13		
60°	0		
70°	0		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10						
室指数	照明率 (×0.01)																								
0.60	110	101	101	96	95	92	109	101	100	95	95	92	98	95	94	91	93	91	89	88					
0.80	118	107	109	102	103	98	116	106	108	102	102	98	105	101	101	98	99	97	95	94					
1.00	124	111	115	106	108	103	121	110	131	106	108	103	110	105	106	102	104	101	99	98					
1.25	127	113	118	108	112	105	124	112	116	108	111	105	113	106	108	104	106	103	101	99					
1.50	130	114	121	110	115	107	126	113	119	109	113	106	115	108	110	105	108	104	102	100					
2.00	134	116	126	112	120	109	130	115	123	111	118	109	118	110	114	107	110	106	104	102					
2.50	137	118	130	115	124	112	133	117	126	114	121	111	121	112	117	110	113	108	106	104					
3.00	139	119	133	116	128	114	135	118	129	115	125	113	123	113	120	112	115	110	108	106					
4.00	143	121	138	119	134	118	138	120	134	118	130	117	127	116	124	115	119	113	111	110					
5.00	145	123	141	121	138	120	140	121	137	120	134	119	130	118	127	117	121	115	114	112					
10.00	150	126	149	126	148	126	145	124	144	125	143	125	135	122	135	123	128	120	120	118					

