


東芝照明器具配光データシート

名称	水銀防犯灯
形名	HB-0462PHWA +CL-601

保守率	良	0.73
	中	0.69
	否	0.65


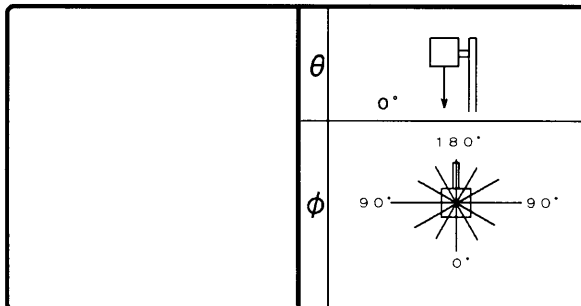


光源	名称	水銀ランプ
	形名	HF40X
	光束	1400 lm x 1

効率	F $\frac{1}{2}$	5.8 %
	F $\frac{1}{4}$	52.9 %
	F \bigcirc	58.7 %
	器具光束	821 lm

備考
後方カッターパ (CL-601) 付

前面	グローブ (プリズム)
反射面	鏡面処理

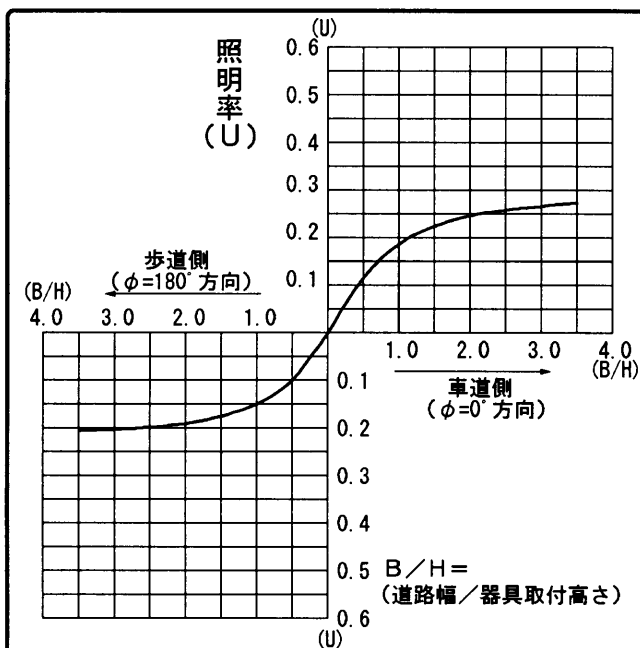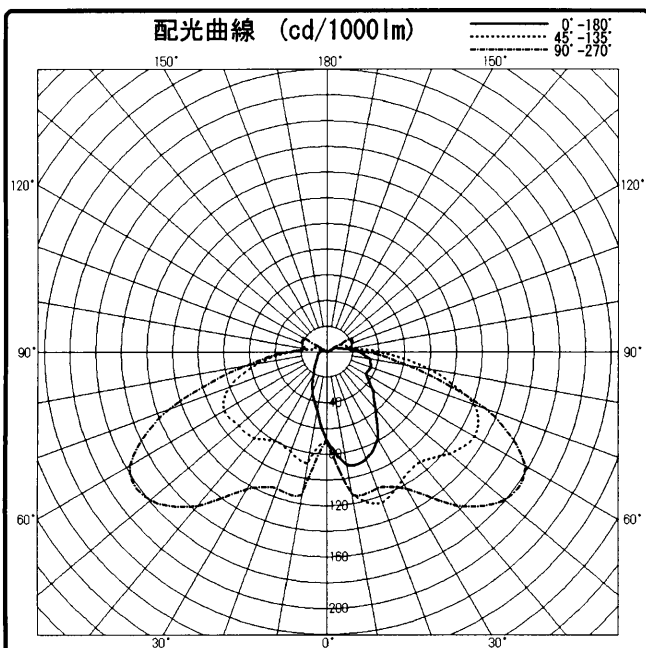

		光度 (cd/1000lm)				
$\theta \backslash \phi$		0°	45°	90°	135°	180°
0°		69	69	69	69	69
10°		89	112	113	88	46
20°		89	125	113	83	33
30°		78	116	123	80	21
40°		58	112	156	88	15
50°		46	124	179	89	13
60°		35	132	177	92	9
70°		36	121	130	80	8
80°		34	81	63	54	7
90°		25	40	29	28	5
100°		16	17	17	12	6
110°		10	18	21	12	5
120°		8	13	22	8	7
130°		0	0	0	0	0
140°		0	0	0	0	0
150°		0	0	0	0	0
160°		0	0	0	0	0
170°		0	0	0	0	0
180°		0	0	0	0	0

