


# 東芝照明器具配光データシート

名称	水銀防犯灯
形名	HB-0462PHWB +CL-601

保守率	良	0.73
	中	0.69
	否	0.65


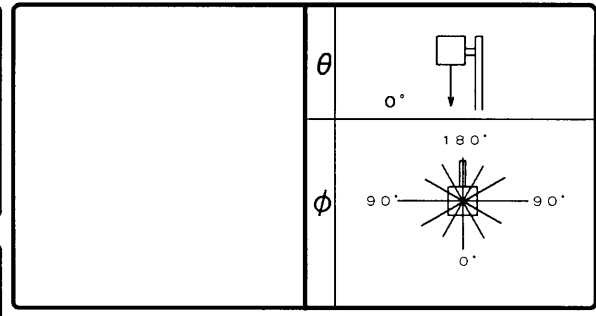


光源	名称	水銀ランプ
	形名	HF40X
	光束	1400 lm x 1

効率	F $\frac{1}{2}$	5.8 %
	F $\frac{1}{4}$	52.9 %
	F $\bigcirc$	58.7 %
	器具光束	821 lm

備考 後方カッターバ (CL-601) 付

前面	グローブ (プリズム)
反射面	鏡面処理

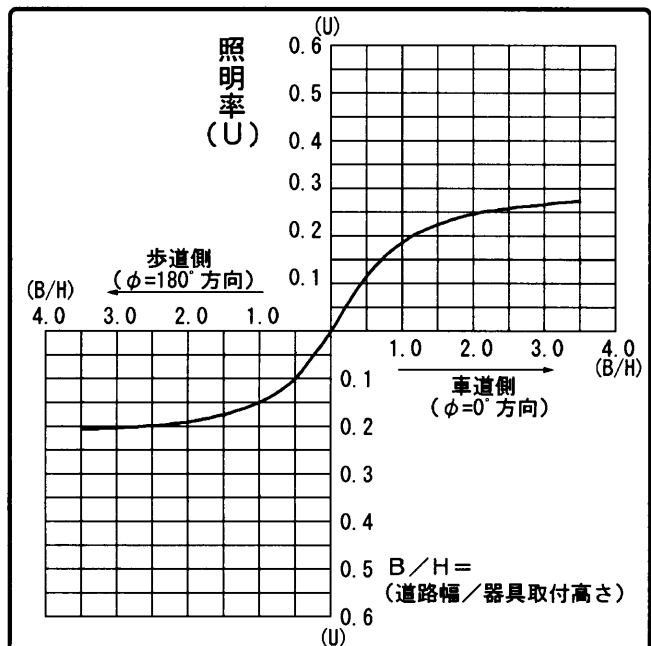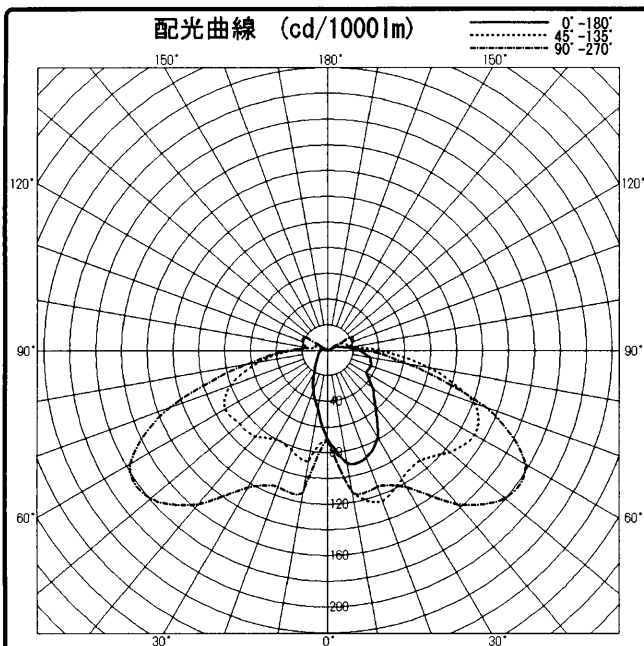

光度 (cd/1000lm)						
$\theta \backslash \phi$	0°	45°	90°	135°	180°	
0°	69	69	69	69	69	
10°	89	112	113	88	46	
20°	89	125	113	83	33	
30°	78	116	123	80	21	
40°	58	112	156	88	15	
50°	46	124	179	89	13	
60°	35	132	177	92	9	
70°	36	121	130	80	8	
80°	34	81	63	54	7	
90°	25	40	29	28	5	
100°	16	17	17	12	6	
110°	10	18	21	12	5	
120°	8	13	22	8	7	
130°	0	0	0	0	0	
140°	0	0	0	0	0	
150°	0	0	0	0	0	
160°	0	0	0	0	0	
170°	0	0	0	0	0	
180°	0	0	0	0	0	

