

東芝照明器具配光データシート


名 称	LED投光器
形 名	LEDS-02902W M-LS9

光源	名称 -
	形名 -
	光束 2120 lm × 1


前 面	カバー（透明）
反射面	鏡面処理

保守率	良	0.69
	中	0.67
	否	0.63

1/10 ビーム角	鉛直	上	36.2°
		下	36.9°
	水平	左	35.9°
		右	35.9°

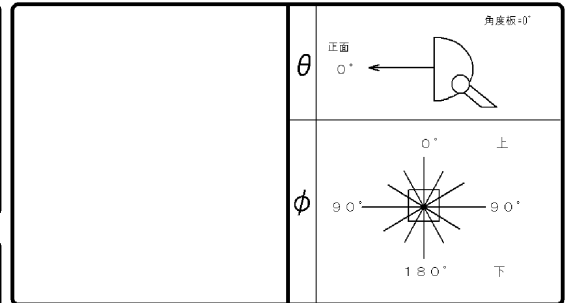

備考
1/10ビーム角はピーク光度を中心にした角度を示しています

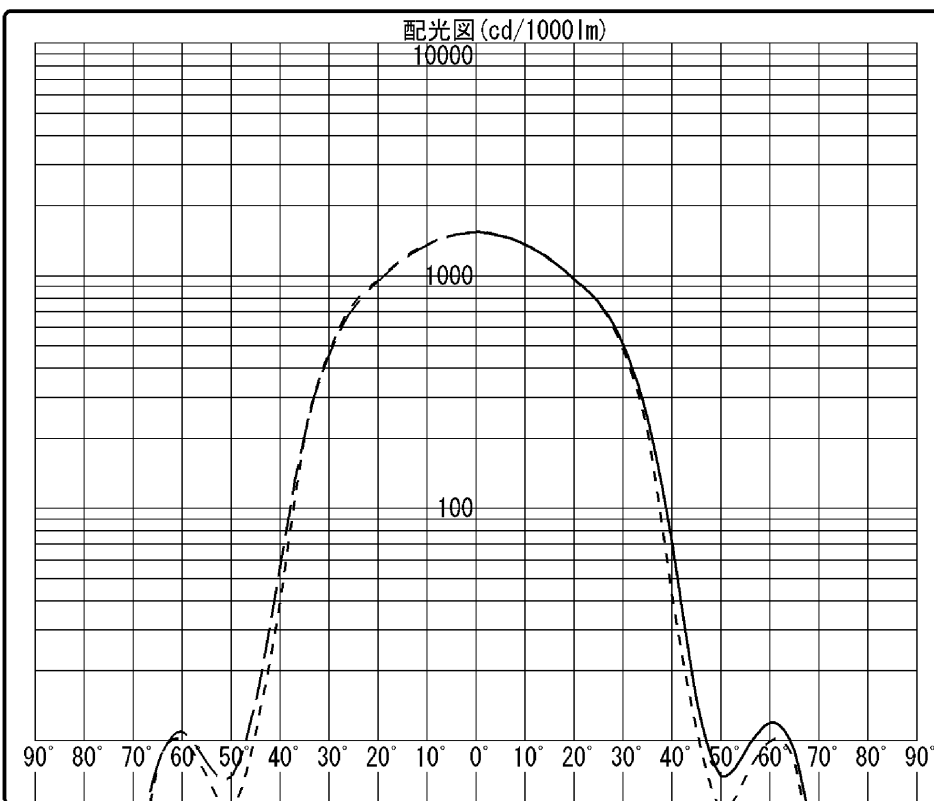

----- φ=0°
----- 90°, 270°
----- 180°

光度 (cd/1000lm)													
θ \ φ	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
0°	1542	1542	1542	1542	1542	1542	1542	1542	1542	1542	1542	1542	1542
10°	1365	1358	1346	1338	1343	1359	1374	1378	1375	1365	1359	1361	1361
20°	951	933	895	872	885	926	963	959	935	913	919	950	970
30°	464	463	466	488	484	471	475	490	513	527	524	517	506
40°	58	66	100	135	119	63	41	66	131	178	150	93	71
50°	7	8	8	8	7	6	5	6	8	9	10	8	7
60°	11	7	8	8	7	6	10	6	7	8	8	8	12
70°	3	2	1	1	1	1	2	1	1	1	2	2	3
80°	1	1	1	1	1	1	1	1	1	1	1	1	1
90°	0	0	0	0	0	0	0	0	0	0	0	0	0

東芝照明器具配光データシート


名 称	LED投光器
形 名	LEDS-02902W M-LS9

光源	名 称	-
	形 名	-
	光束	2120 lm × 1

前 面	カバー（透明）
反射面	鏡面処理

保守率	良	0.69
	中	0.67
	否	0.63

1/10 ビーム角	鉛直	上	36.2°
		下	36.9°
	水平	左	35.9°
		右	35.9°

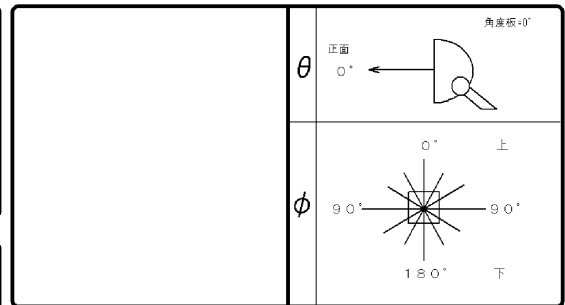

1/10ビーム角はピーク光度を中心にした角度を示しています

光度 (cd/1000lm)													
θ \ φ	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
0°	1542	1542	1542	1542	1542	1542	1542	1542	1542	1542	1542	1542	1542
1°													
2°													
3°													
4°													
5°	1497	1493	1491	1489	1490	1494	1497	1499	1502	1501	1499	1495	1492
6°													
7°													
8°													
9°													
10°	1365	1358	1346	1338	1343	1359	1374	1378	1375	1365	1359	1361	1361
11°													
12°													
13°													
14°													
15°	1170	1158	1136	1123	1134	1165	1192	1193	1177	1160	1156	1168	1176
16°													
17°													
18°													
19°													
20°	951	933	895	872	885	926	963	959	935	913	919	950	970
25°	733	717	683	647	677	731	764	760	726	686	712	753	768
30°	464	463	466	488	484	471	475	490	513	527	524	517	506
35°	211	223	256	308	283	233	210	242	301	360	318	272	243
40°	58	66	100	135	119	63	41	66	131	178	150	93	71
45°	15	16	20	32	16	13	11	14	20	52	35	19	15
50°	7	8	8	8	7	6	5	6	8	9	10	8	7
55°	8	7	9	9	8	6	7	6	8	9	9	8	9
60°	11	7	8	8	7	6	10	6	7	8	8	8	12
65°	8	5	4	3	3	4	8	5	4	3	4	5	9
70°	3	2	1	1	1	1	2	1	1	1	2	2	3
75°	2	1	1	1	1	1	1	1	1	1	1	1	2
80°	1	1	1	1	1	1	1	1	1	1	1	1	1
85°	0	0	0	0	0	0	0	0	0	0	0	0	0
90°	0	0	0	0	0	0	0	0	0	0	0	0	0