


■ 東芝ランプ 配光データシート

名 称	東芝電球形LEDランプ
形 名	LDG8L-D/G70
光 束	410 lm × 1

保 守 率	良	1.00
	中	1.00
	否	1.00

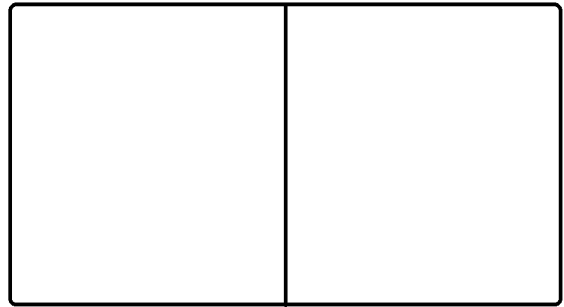

効 率	F	%
	F	%
	F	100 %
	器具 光束	410 lm

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

備 考	データは初期の標準値です。
--------	---------------

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	142		
10°	140		
20°	137		
30°	132		
40°	126		
50°	117		
60°	107		
70°	95		
80°	83		
90°	71		
100°	58		
110°	46		
120°	35		
130°	25		
140°	17		
150°	11		
160°	5		
170°	0		
180°	0		

反 射 率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		46	42	33	31	25	24	43	40	31	30	24	23	28	27	21	21	19	19	15	12		
0.80		55	50	41	38	32	31	51	47	39	37	31	30	35	33	28	27	25	25	20	17		
1.00		62	56	48	45	39	37	58	53	46	43	37	36	41	39	34	33	30	30	24	21		
1.25		68	61	55	50	46	43	64	57	52	48	43	41	46	44	39	38	35	34	29	25		
1.50		73	65	61	55	51	47	68	61	57	52	49	46	51	48	44	42	39	38	33	28		
2.00		80	70	69	62	60	55	75	66	65	59	57	52	57	53	51	48	46	44	38	34		
2.50		85	73	75	66	66	60	79	70	70	63	63	57	62	57	56	52	50	48	42	38		
3.00		88	76	79	69	71	63	82	72	74	66	67	61	65	60	60	56	53	51	46	41		
4.00		93	79	85	73	78	68	87	75	80	70	73	66	70	64	65	60	58	55	50	45		
5.00		96	81	89	76	83	72	89	77	83	73	78	69	73	67	69	63	61	58	53	48		
10.00		102	85	98	83	94	80	95	82	92	79	88	77	80	73	78	71	69	65	60	55		

