


# 東芝ランプ 配光データシート

名称	LEDランプ
形名	LDR5L-W/75W
光束	440 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

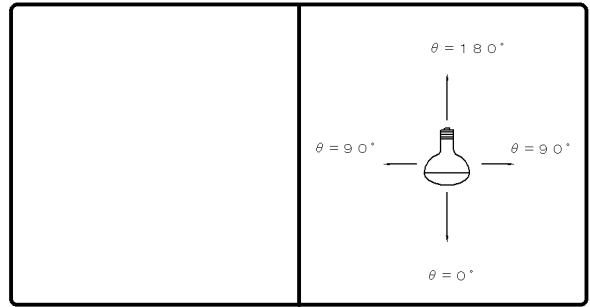

効率	F	%
	F	%
	F	100 %
	器具光束	440 lm

最大取付間隔	
A-A	0.48H
B-B	0.48H

備考	
----	--

光度 (cd/1000lm)			
0°	3069	25°	533
1°	3063	30°	367
2°	3045	35°	236
3°	3004	40°	135
4°	2939	45°	68
5°	2846	50°	32
6°	2737	55°	17
7°	2609	60°	11
8°	2476	65°	8
9°	2326	70°	5
10°	2175	75°	3
11°	2010	80°	2
12°	1851	85°	1
13°	1688	90°	0
14°	1539		
15°	1388		
16°	1254		
17°	1122		
18°	1008		
19°	903		
20°	816		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	照明率 (×0.01)																						
0.60	111	102	103	97	97	94	110	102	102	97	97	94	100	96	96	94	95	93	92	91			
0.80	122	111	114	107	109	105	120	110	113	107	108	104	111	106	107	104	106	103	102	101			
1.00	124	111	116	108	111	105	122	111	115	107	110	105	112	106	108	104	106	103	102	101			
1.25	127	113	119	109	113	106	124	112	117	108	112	105	114	107	109	105	107	104	102	101			
1.50	129	114	122	110	116	108	126	113	119	110	114	107	116	108	111	106	109	105	103	102			
2.00	133	116	126	113	121	110	129	115	123	112	118	109	119	110	115	108	111	107	105	104			
2.50	135	117	129	114	124	112	132	116	126	113	122	111	121	112	117	110	113	108	107	105			
3.00	137	118	132	116	127	113	133	117	129	115	124	113	122	113	119	111	115	110	108	106			
4.00	140	119	136	118	132	116	136	118	132	117	129	115	125	115	123	114	117	112	110	109			
5.00	142	120	139	119	136	118	138	119	135	118	132	117	127	116	125	115	119	113	112	110			
10.00	147	123	145	122	144	122	142	121	140	121	139	121	132	119	131	119	124	117	116	114			

