


東芝ランプ 配光データシート

名称	LEDランプ
形名	LDR12L-D-W/ 100W
光束	750 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

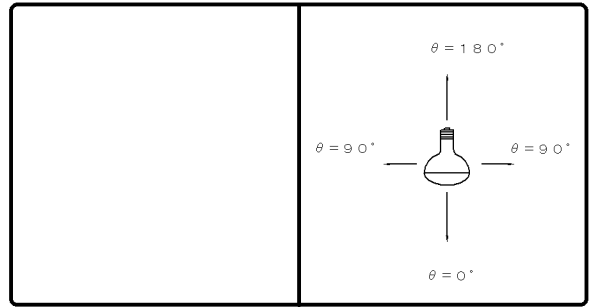

効率	F	%
	F	%
	F	100 %
	器具光束	750 lm

最大取付間隔	
A-A	0.48H
B-B	0.48H

備考	
----	--

光度 (cd/1000lm)			
0°	3067	25°	513
1°	3061	30°	359
2°	3047	35°	231
3°	3005	40°	134
4°	2945	45°	66
5°	2841	50°	32
6°	2737	55°	18
7°	2594	60°	13
8°	2470	65°	9
9°	2307	70°	6
10°	2166	75°	4
11°	1984	80°	2
12°	1835	85°	1
13°	1655	90°	0
14°	1514		
15°	1349		
16°	1225		
17°	1083		
18°	979		
19°	866		
20°	789		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室指数		照明率 (×0.01)																					
0.60	110	101	101	96	96	93	108	100	100	96	96	93	99	95	95	92	94	92	90	89			
0.80	120	109	112	106	107	103	118	109	111	105	107	103	109	104	105	102	104	102	100	100			
1.00	122	110	114	106	109	104	120	109	113	106	108	103	110	105	106	103	105	102	100	99			
1.25	125	111	117	107	111	104	122	110	115	107	110	104	112	105	108	103	106	102	101	99			
1.50	127	112	120	109	114	106	125	111	118	108	113	106	114	107	110	105	107	104	102	101			
2.00	131	114	124	111	119	109	128	113	122	110	117	108	117	109	113	107	110	106	104	102			
2.50	134	115	127	113	122	110	130	114	125	112	120	110	119	110	116	108	112	107	105	104			
3.00	136	116	130	114	126	112	132	115	127	113	123	111	121	111	118	110	113	108	106	105			
4.00	139	118	134	116	130	115	134	117	131	115	127	114	124	113	121	112	116	110	109	107			
5.00	141	119	137	118	134	116	136	118	133	117	130	116	126	115	124	114	118	112	111	109			
10.00	145	121	143	121	142	121	140	120	139	120	137	120	130	118	129	117	122	115	114	112			

