


東芝ランプ 配光データシート

名称	LEDランプ
形名	LDA6N-H/60W
光束	810 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

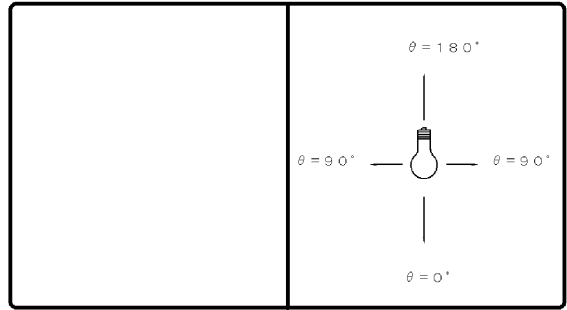

効 率	F		%
	F		%
	F	100	%
	器具 光束	810	lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	224		
10°	220		
20°	208		
30°	191		
40°	169		
50°	146		
60°	122		
70°	100		
80°	79		
90°	62		
100°	47		
110°	36		
120°	28		
130°	22		
140°	17		
150°	14		
160°	11		
170°	8		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数	照明率 (×0.01)																																				
0.60	56	52	42	39	33	32	53	49	40	38	32	31	37	35	30	29	28	27	23	20																	
0.80	67	61	52	49	43	41	63	58	50	47	41	40	46	44	38	37	36	35	30	27																	
1.00	74	66	59	55	49	47	70	63	57	53	47	45	52	49	44	43	41	40	35	31																	
1.25	81	72	67	61	57	53	77	69	64	59	55	52	58	55	51	49	47	45	40	36																	
1.50	86	76	73	66	62	58	81	73	69	63	60	56	63	59	55	53	51	49	44	40																	
2.00	94	82	82	73	73	66	89	79	78	71	69	64	71	66	64	60	58	56	51	46																	
2.50	99	85	88	78	79	71	93	82	84	75	76	69	75	70	69	65	63	60	55	50																	
3.00	103	88	93	81	84	75	97	85	88	78	81	73	79	73	73	68	67	64	59	54																	
4.00	108	92	99	86	92	81	101	88	94	83	88	78	84	77	79	73	72	68	63	58																	
5.00	111	94	103	89	97	84	104	90	98	86	92	82	88	80	83	76	75	71	67	62																	
10.00	117	98	113	95	109	93	111	95	107	92	103	90	95	86	93	84	83	79	74	69																	

