

東芝照明器具配光データシート


名 称	LED高天井用照明器具
形 名	LEDJ-10915NM-LS9

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	9400 lm

保 守 率	良	0.88
	中	0.86
	否	0.81

最大取付間隔	
A-A	1.0 H
B-B	1.0 H

前 面	ガラス (クリアー)
反射面	レンズ

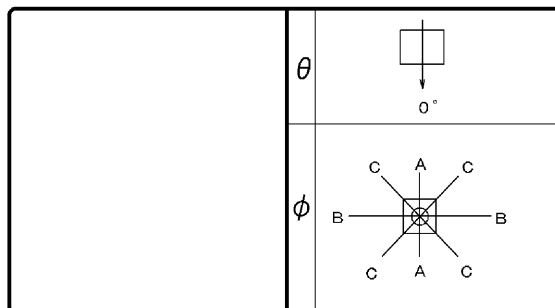

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	957		
10°	1006		
20°	846		
30°	461		
40°	157		
50°	58		
60°	32		
70°	18		
80°	5		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	固 有 照 明 率 (×0.01)																						
0.60	87	80	78	74	72	70	86	80	77	73	72	70	76	73	71	69	70	69	66	65			
0.80	98	89	89	84	84	80	97	88	88	83	83	80	87	83	82	79	81	79	77	76			
1.00	102	92	93	87	87	83	100	91	92	86	87	83	90	85	85	82	84	81	79	78			
1.25	106	94	98	90	92	86	104	93	96	89	91	86	93	88	89	85	87	84	82	81			
1.50	109	96	101	92	96	89	107	95	100	91	94	88	96	90	92	87	89	87	84	83			
2.00	114	99	107	96	102	93	111	98	105	95	100	92	101	93	97	91	94	90	88	87			
2.50	117	101	111	98	106	95	114	100	108	97	104	95	103	95	100	93	96	92	90	89			
3.00	119	102	114	99	109	97	115	101	111	99	106	96	105	97	102	95	98	94	92	90			
4.00	122	104	117	102	114	100	118	103	114	101	111	99	108	99	105	97	101	96	94	93			
5.00	124	105	120	103	117	101	120	103	116	102	113	101	110	100	108	99	102	97	96	94			
10.00	128	107	126	106	124	105	123	105	121	105	120	104	114	103	113	102	106	100	99	97			

