

東芝照明器具配光データシート


名 称	LED高天井用照明器具
形 名	LEDJ-10915NW-LS9

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	9900 lm

保 守 率	良	0.88
	中	0.86
	否	0.81

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	ガラス (クリアー)
反射面	レンズ

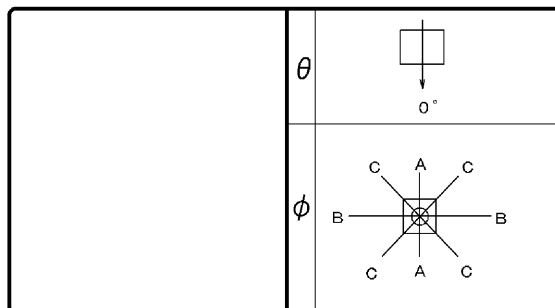

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	535		
10°	530		
20°	513		
30°	474		
40°	387		
50°	158		
60°	17		
70°	9		
80°	2		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	固有照明率 (×0.01)																						
0.60	75	69	63	60	56	55	74	68	63	60	56	54	61	59	55	54	55	54	50	49			
0.80	88	80	77	73	70	67	87	79	76	72	70	67	74	71	68	66	67	66	63	61			
1.00	95	85	84	78	77	73	92	84	83	77	76	73	80	76	75	72	73	71	68	67			
1.25	101	90	91	84	84	79	99	89	90	83	83	79	87	82	81	78	79	77	74	73			
1.50	106	93	96	88	90	83	103	92	94	87	88	83	91	85	86	82	84	81	78	77			
2.00	112	98	104	93	98	90	109	96	102	92	96	89	98	91	93	88	90	87	84	83			
2.50	115	100	109	96	103	93	112	98	106	95	101	92	101	93	97	91	93	90	87	86			
3.00	118	101	112	98	107	95	114	100	109	97	104	95	103	95	100	93	96	92	90	88			
4.00	121	103	116	100	112	98	117	102	113	99	109	97	107	98	104	96	99	94	92	91			
5.00	123	104	119	102	115	100	119	103	115	101	112	99	108	99	106	97	101	96	94	92			
10.00	126	106	124	105	122	103	122	104	120	103	118	102	112	101	111	100	104	99	97	95			

