


東芝ランプ 配光データシート

名称	蛍光水銀ランプ
形名	LDRDC7LWE11 /D-AL3
光束	370 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

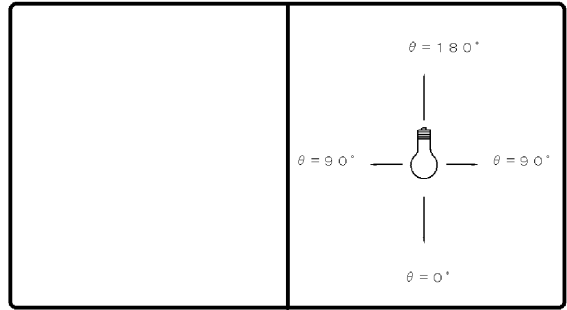

効 率	F	%
	F	%
	F	100 %
	器具 光束	370 lm

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
0°	541	25°	434
1°	540	30°	399
2°	537	35°	356
3°	535	40°	302
4°	531	45°	241
5°	528	50°	182
6°	523	55°	131
7°	518	60°	88
8°	514	65°	51
9°	510	70°	22
10°	505	75°	9
11°	498	80°	1
12°	493	85°	0
13°	490	90°	0
14°	484		
15°	480		
16°	475		
17°	470		
18°	465		
19°	461		
20°	457		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	50	30	50	30	50	30	30	10	0								
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0					
室指数	照 明 率 (×0.01)																							
0.60	66	61	53	50	45	44	64	60	52	50	45	44	51	49	44	43	44	39	37					
0.80	77	70	65	60	56	54	75	69	63	60	56	54	62	59	55	53	54	53	49	47				
1.00	86	78	74	69	66	63	84	76	73	68	65	62	71	67	64	62	63	61	57	55				
1.25	93	83	82	75	74	70	91	82	81	74	73	69	77	73	71	68	69	67	64	62				
1.50	98	87	88	80	81	75	96	85	86	79	79	74	83	78	77	73	75	72	69	67				
2.00	105	92	97	86	90	82	102	90	94	85	88	81	90	84	85	80	82	79	76	74				
2.50	110	95	102	90	96	86	106	93	99	89	94	86	94	87	90	84	86	83	80	78				
3.00	112	96	106	93	100	89	109	95	103	92	98	89	98	90	93	87	90	86	83	81				
4.00	116	99	111	96	106	93	112	97	107	95	103	92	101	93	98	91	94	89	87	85				
5.00	118	100	114	98	110	95	114	99	110	97	107	94	104	95	101	93	96	91	89	87				
10.00	123	103	120	101	118	100	118	101	116	100	114	99	109	98	107	97	101	95	94	92				

