


東芝照明器具配光データシート

名称	LED高天井器具
形名	LEDJ21901HN-LS2

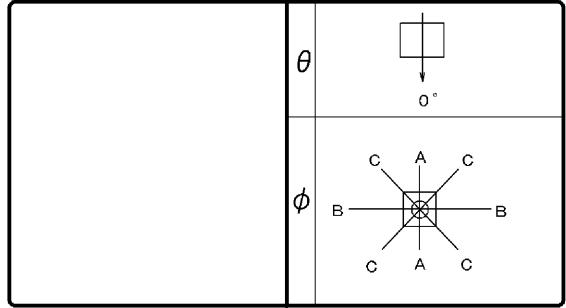

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	19800 lm

保 守 率	良	0.83
	中	0.81
	否	0.77

前面	カバー（透明）
反射面	白色

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

$\theta \setminus \phi$	A-A	B-B	C-C
0°	486		
10°	489		
20°	466		
30°	406		
40°	319		
50°	194		
60°	73		
70°	29		
80°	8		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反 射 率 (%)	天井	80						70						50						30						20						0																
	壁	70		50		30		70		50		30		50		30		30		30		10		10		10		0		10		0																
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10																	
室指数	固有照明率 (×0.01)																																															
0.60	71	66	59	56	51	49	70	64	58	55	51	49	56	54	50	49	49	48	45	43																												
0.80	84	76	72	68	64	62	82	75	71	67	64	61	69	66	63	61	62	60	57	55																												
1.00	91	81	79	73	71	68	88	80	78	73	70	67	75	71	69	66	68	66	62	61																												
1.25	98	87	87	80	79	74	95	86	85	79	78	74	82	77	76	73	74	72	68	67																												
1.50	102	90	92	84	85	79	99	89	90	83	83	78	87	81	81	77	79	76	73	71																												
2.00	109	95	101	90	94	86	106	94	98	89	92	85	94	87	89	84	86	83	80	78																												
2.50	113	98	105	93	99	90	110	96	103	92	97	89	98	90	93	87	90	86	83	82																												
3.00	116	99	109	96	104	92	112	98	106	95	101	92	101	93	97	90	93	89	86	85																												
4.00	120	102	114	99	109	96	115	100	111	98	107	95	105	96	101	94	97	92	90	88																												
5.00	122	103	117	100	113	98	117	102	113	99	110	97	107	97	104	96	99	94	92	90																												
10.00	126	105	123	104	121	103	121	104	119	103	117	102	111	101	110	100	104	98	96	94																												

